


PERMIT NO.: _____

OWNERS NAME: _____

PROJECT LOCATION: _____

SITE PLAN:

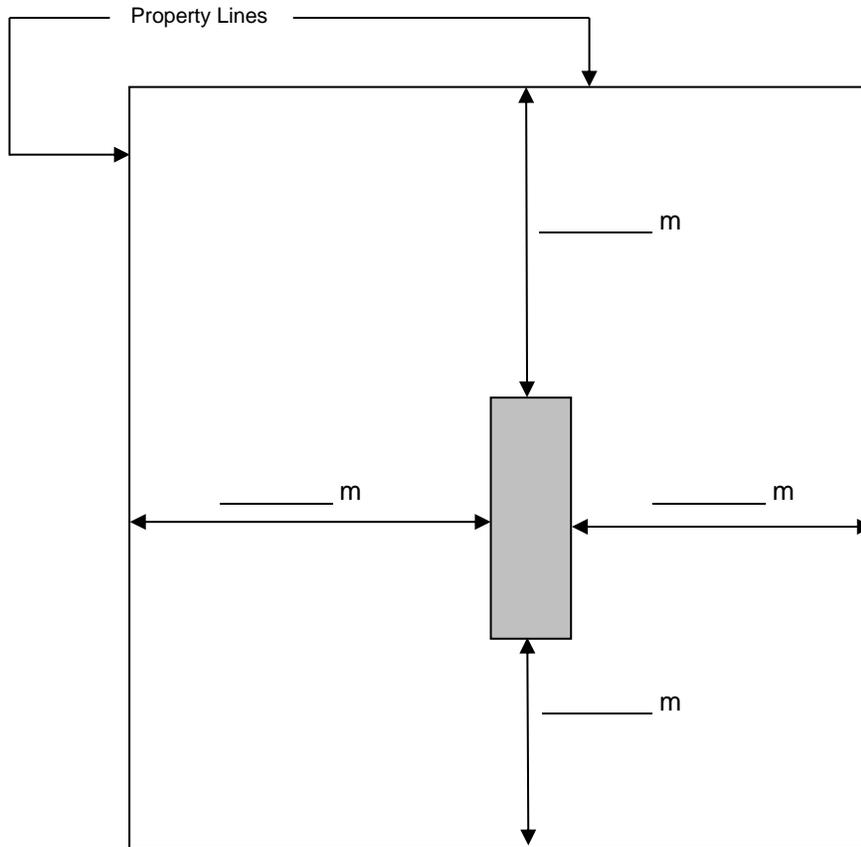

LABELS: (See Standata 19-BCV-002)

CSA Label #: _____

AMA Label (if built prior to December 16, 2019) #: _____

Year of Manufacture: _____

Model / Serial #: _____

If the home does not have a CSA number, then a full Engineer's report will be required to certify the structure.

Calgary	25, 2015 - 32 Avenue NE	T2E 6Z3	Ph: 403-717-2344	Fax: 403-717-2340	Toll Free Ph: 1-888-717-2344	Toll Free Fax: 1-888-717-2340
Edmonton	14613 - 134 Avenue	T5L 4S9	Ph: 780-489-4777	Fax: 780-489-4711	Toll Free Ph: 1-866-999-4777	Toll Free Fax: 1-866-999-4711
Lloydminster	Unit 2, 1724 - 50 Avenue	T9V 0Y1	Ph: 780-870-9020	Fax: 780-870-9036		
Red Deer	3, 6264 - 67A Street	T4P 3E8	Ph: 403-358-5545	Fax: 403-358-5085	Toll Free Ph: 1-888-358-5545	Toll Free Fax: 1-866-358-5085
Lethbridge	422 North Mayor Magrath Drive	T1H 6H7	Ph: 403-320-0734	Fax: 403-320-9969	Toll Free Ph: 1-877-320-0734	

PERMITS & INSPECTIONS

Please check off boxes that apply to your manufactured home set up and attach this form to your building permit application.

FOUNDATION:


- Concrete Piling (engineering required) Others: _____
- Wood Blocking as per CSA
- Engineered Screw Piling
(Must be fabricated by CWB certified welder)
- Building anchorage to be provided where required
- Foundation as per Part 4 or 9 of the National Building Code – 2019 Alberta Edition
- Refer: CSA-Z240.10.1
“Site preparation, foundation, & anchorage of mobile homes”

DECKS/STAIR LANDINGS


- Stairs: Rise: 125 mm to 200 mm (5” to 8”)
Run: 210 mm to 355 mm (8¼” to 14”)
Tread: 235 mm to 355 mm (9¼” to 14”) Others: _____
- Handrail: 800 mm to 965 mm ht. (32” to 38”) required
for exterior stairs with >3 risers Others: _____
- Guards: 900 mm ht (36”) required for decks/landings
600 -1,800 mm ht (2’ to 6”) above the adjacent grade
1,070 mm ht, (42”) for decks/landing >1,800 mm above
grade.

CRAWLSPACE:


- Clearance: 24” between grade & bot. of floor joists Others: _____
- Ventilation min. 1 ft²/50 ft² of crawl space area
- Access hatch 500 mm x 700 mm (20” x 28”) min
- Ground shall be graded min 2% for proper drainage
- Ground cover 0.1 mm poly Others: _____

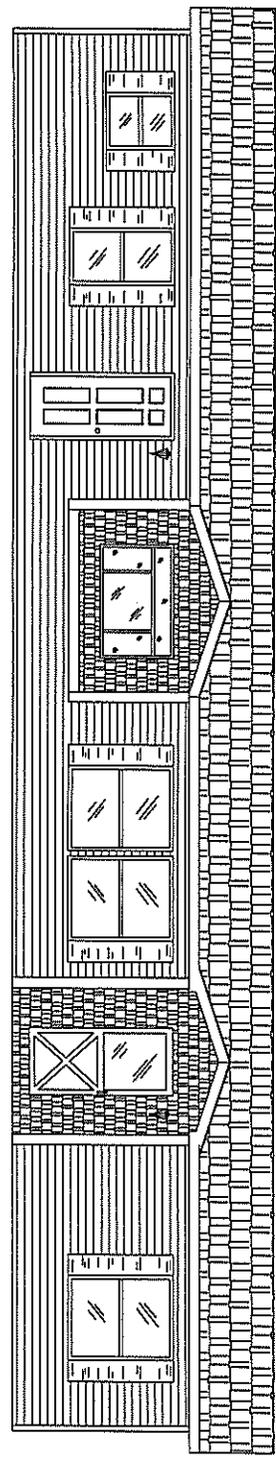


FRONT ELEVATION

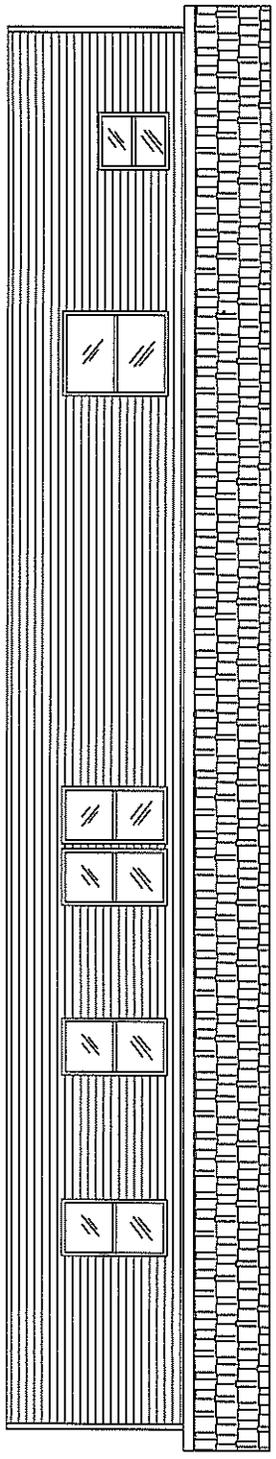


REAR ELEVATION

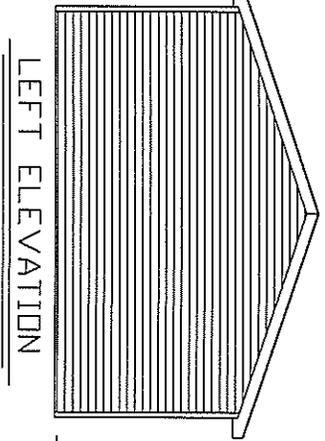


LEFT ELEVATION

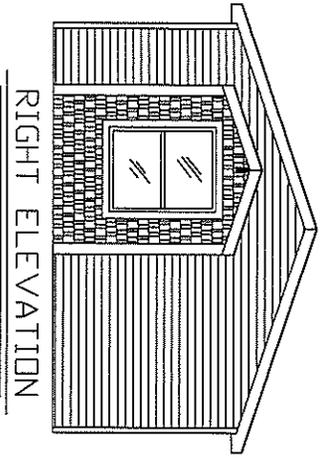

RIGHT ELEVATION

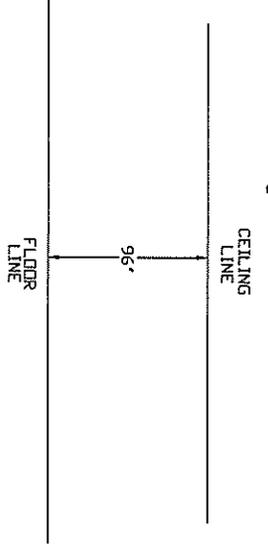

FLOORPLAN: Please sketch in the layout of the manufactured home.

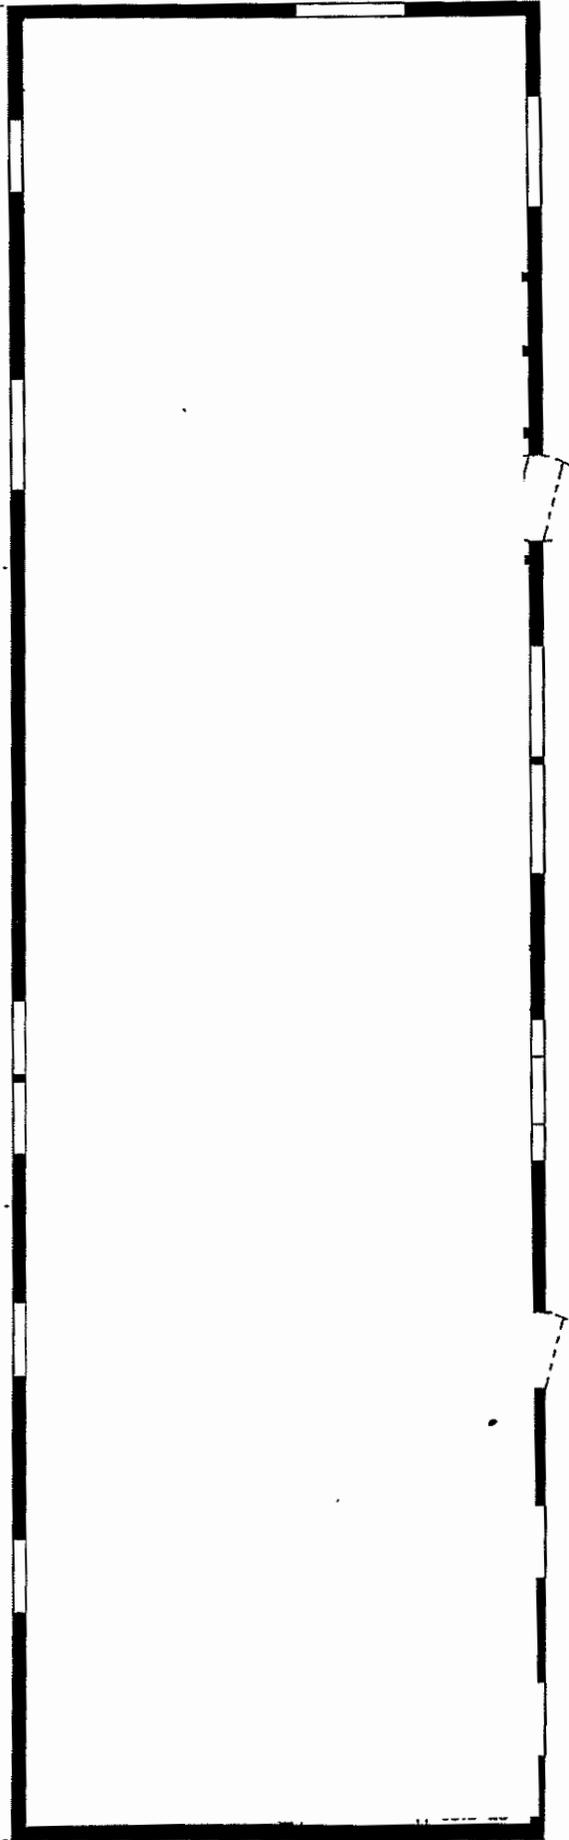

Please check off boxes that apply to your addition and attach this form to your building permit application.

MANUFACTURED HOME ADDITIONS
ROOF:

- | | |
|---|--|
| <input type="checkbox"/> Manufactured Truss @ 600 mm (24") o/c max | <input type="checkbox"/> Others: _____ |
| <input type="checkbox"/> R34 Insulation min. with 6 mil poly V.B. if heated | <input type="checkbox"/> Others: _____ |
| <input type="checkbox"/> Ceiling 12.5 mm (½") Drywall | <input type="checkbox"/> Others: _____ |
| <input type="checkbox"/> Roll roofing eave protection required (if heated) | <input type="checkbox"/> Others: _____ |

WALL CONSTRUCTION:

- | | |
|--|--|
| <input type="checkbox"/> Exterior finished – Vinyl Siding | <input type="checkbox"/> Others: _____ |
| <input type="checkbox"/> ¼" O.S.B. wall sheathing | <input type="checkbox"/> Others: _____ |
| <input type="checkbox"/> 2" x 4" Wall studs @ 600 mm (24") o/c | |
| <input type="checkbox"/> R12 Insulation min with 6 mil poly V.B. if heated | |
| <input type="checkbox"/> 12.5 mm (½") Drywall interior finish | <input type="checkbox"/> Others: _____ |

FLOOR:

- | | |
|---|--|
| <input type="checkbox"/> 2" x 10" Joist @ 16" o/c. (provide mid strapping if over 7' in joist span) | <input type="checkbox"/> Others: _____ |
| <input type="checkbox"/> 15.5 mm (5/8") thick OSB floor sheathing | <input type="checkbox"/> Others: _____ |

FOUNDATION:

- | | |
|---|--|
| <input type="checkbox"/> Concrete Piling as per CSA | <input type="checkbox"/> Others: _____ |
| <input type="checkbox"/> Wood Blocking as per CSA | |
| <input type="checkbox"/> Engineered Screw Piling. Must be fabricated by CWB certified welder | |
| <input type="checkbox"/> Foundation as per Part 4 or 9 of the National Building Code – 2019 Alberta Edition | |

EXISTING MANUFACTURED HOMES TO BE RELOCATED ON A NEW SITE:

- Interior walls and ceiling must have surface flame spread rating of 150 or less
- Walls within 450 mm of range top cooking surface must have at least 9.5 mm GWB
- Bedrooms must have window with a min, 380 mm opening and a min 0.35 m² in area
- Furnace room must be covered with at least 7.9 mm thick. Gypsum Wall Board
- Walls within 150 mm of the HWT must be covered with at least 7.9 mm thick GWB
- Gas fired HWT must be enclosed in a separate room w/ a door. Room must be supplied with outside air for combustion